


FED. SUPPLY CLASS
NONE

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC
1000 WILSON BLVD.
ARLINGTON, VA 22209

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

**2024 RULES
AMERICAN ROCKETRY CHALLENGE**

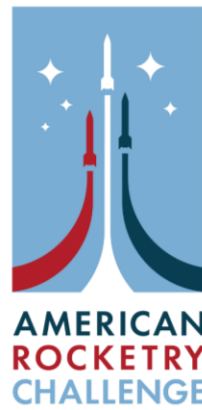

www.aia-nas.org

ISSUE DATE: SEPTEMBER 2002 REVISION DATE: MAY 20, 2023


<p>THIRD ANGLE PROJECTION </p>	<p>CUSTODIAN NATIONAL ASSOCIATION OF ROCKETRY</p>	<p>REVISION 24</p>
<p>PROCUREMENT SPECIFICATION NONE</p>	<p>TITLE 2024 RULES, AMERICAN ROCKETRY CHALLENGE</p>	<p>CLASSIFICATION STANDARD PRACTICE ARC-1 SHEET 1 OF 6</p>

TABLE OF CONTENTS

1. INTRODUCTION3

1.1 SCOPE3

2. CONTEST RULES.....3

2.1 SAFETY3

2.2 TEAMS3

2.3 ROCKET REQUIREMENTS3

2.4 PAYLOAD4

2.5 DURATION SCORING4

2.6 ALTITUDE SCORING4

2.7 FLIGHTS4

2.8 SAFE RECOVERY5

2.9 RETURNS5

2.10 LAUNCH SYSTEMS5

2.11 FLIGHT CONTROL.....5

2.12 PLACES5

3. AIA’S NATIONAL AEROSPACE STANDARDS6

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC
1000 WILSON BLVD.
ARLINGTON, VA 22209

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

FORM 21-01

REVISION 24
ARC-1 SHEET 2

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC
1000 WILSON BLVD.
ARLINGTON, VA 22209

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

FORM 21-01

1. INTRODUCTION

1.1 SCOPE

This document provides the rules for the 2024 American Rocketry Challenge (ARC).

2. CONTEST RULES

2.1 SAFETY

All rockets must be built and flown in accordance with the Model Rocket Safety Code of the National Association of Rocketry (NAR), any applicable local fire regulations, and Federal Aviation Regulations. Rockets flown at the Finals must have previously flown safely and successfully. Rockets will be inspected before launch and observed during flight by a NAR official, whose judgment on their compliance with the Safety Code and with these rules will be final. Teams are encouraged to consult with designated NAR officials who are running this event well before the fly-off to resolve any questions about design, the Safety Code, or these rules.

2.2 TEAMS

The application for a team must come from a single school or a single U.S. incorporated non-profit youth or educational organization (excluding the NAR, Tripoli Rocketry Association, or any of their local chapters or any other incorporated rocket organization). There is no limit to the number of teams that may be entered from any single school or organization, but no more than two teams containing students who attend the same school or who are members of the same organization, regardless of whether the teams are sponsored by that school or organization, can be invited to attend the Finals. Team members must be students who are currently enrolled in grades 6 through 12 in a U.S. school or homeschool. Teams may have members from other schools or other organizations and may obtain financing from any source, not limited to their sponsoring organization. Teams must be supervised by an adult approved by the principal of the sponsoring school, or by an officially-appointed adult leader of their sponsoring organization. Minimum team size is three students and maximum is ten students. Each student member must make a significant contribution to the designing, building, and/or launching of the team's entry. No part of any of these activities for a rocket used in a qualification flight or at the Finals may be done by any adult, by a company (except by the sale of standard off-the-shelf components available to the general public, but not kits or designs for the event), or by any person not a student on that team. If custom 3-D printed parts or circuit boards are used in a rocket, these must be designed and fabricated by student team members only. No student may be on more than one team. The supervising teacher/adult may supervise more than one team. The Challenge is open to the first 1000 teams that submit a completed application, including payment, between June 1 and December 1, 2023.

2.3 ROCKET REQUIREMENTS

Rockets must not exceed 650 grams gross weight at liftoff. The overall length of the rocket must be no less than 650 millimeters (25.6 inches) as measured from the lowest to the highest points of the airframe structure (including fins) in launch configuration. They must use body tubes of two different diameters in their exterior structure, the upper one of which must be no greater than 2.25 inches (57 millimeter) in diameter and the lower must be no less than 2.50 inches (63.5 millimeters) in diameter. Each body tube must be no less than 6 inches (150 millimeters) long. All parts of the rocket (other than disposable recovery wadding) must descend tethered together and must use parachute recovery. Rockets must have the team's official ARC entry number written on them. Rockets flown at the Finals will be required to have a paint or other decorative coating applied to any wood, paper, or fiber exterior surface of the rocket and will be assessed a 5-point flight score penalty on their first flight at the Finals if they do not. Rockets may not be commercially-made kits designed for this event or kits designed to carry egg payloads with the only modification being the addition of an altimeter compartment. They must have only one stage. They must be powered only by commercially-made model rocket motors of "F" or lower power class that are listed on the ARC Certified Motor List posted on the ARC website and provided in the ARC Handbook. Any number of motors may be used, but the motors used must not contain a combined total of more than 80 Newton-seconds of total impulse based on the total impulse ratings in the ARC list and they must be used only for flight propulsion. Motors must be retained in the rocket during flight and at ejection by a positive mechanical means (clip, hook, screw-on cap, etc.) and not retained simply by friction fit in the motor mounting tube, but they must be removable post-flight. Rockets must not contain any pyrotechnic charges except those provided as part of

REVISION 24
ARC-1 SHEET 3

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC
1000 WILSON BLVD.
ARLINGTON, VA 22209

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

FORM 21-01

the basic commercially-made rocket motor used for the flight, and these must be used only in the manner prescribed in the instructions for that motor.

2.4 PAYLOAD

Rockets must contain and completely enclose (in any orientation and at any place on the rocket) one raw hen's egg of 55 to 61 grams weight and a diameter of 45 millimeters or less; and must return it from the flight without any cracks or other external damage. The egg will be issued to the teams by event officials during the Finals, but teams must provide their own egg for their qualifying flights. The egg and altimeter must be removed from the rocket at the end of a qualification or Finals flight in the presence of a designated NAR official and presented to that official, who will inspect the egg for damage after their removal and will read the altimeter score. All coatings, padding, or other materials used to protect the egg must be removed by the team prior to this inspection. Any external damage to the egg noted after its flight and removal from the rocket by the team is disqualifying.

2.5 DURATION SCORING

The duration score for each flight shall be based on total flight duration of the rocket, measured from first motion at liftoff from the launch pad until the moment that the first part of the rocket touches the ground (or a tree) or until it can no longer be seen due to distance or to an obstacle. Times must be measured independently by two people not on the team, one of whom is the official NAR-member adult observer, using separate electronic stopwatches that are accurate to 0.01 seconds. The official duration will be the average of the two times, rounded to the nearest 0.01 second, with .005 seconds being rounded up to the next highest 0.01 seconds. If one stopwatch malfunctions, the remaining single time will be used. The flight duration goal is a range of 43 to 46 seconds. Flights with duration in the range of 43 to 46 seconds get a perfect duration score of zero. Duration scores for flights with duration below 43 seconds will be computed by taking the absolute difference between 43 seconds and the measured average flight duration to the nearest 1/100 second and multiplying this by 4. Duration scores for flights with durations above 46 seconds will be computed by taking the absolute difference between 46 seconds and the measured average flight duration to the nearest 1/100 second and multiplying this by 4. These duration scores are always a positive number or zero. The target duration range for flights at the Finals will be the same regardless of the altitude target.

2.6 ALTITUDE SCORING

Rockets must contain one electronic altimeter of the specific commercial types approved for use in the ARC that will be the sole basis for the altitude score. These types are the Perfectflite Pnut or Firefly or the Jolly Logic Altimeter One or Altimeter Two. The altimeter must be inspected by an NAR official both before and after the flight, and may not be modified in any manner. The altimeter must be confirmed by this official before flight to not have been triggered and to be ready for flight. The Jolly Logic altimeters must have all previous flights erased before a scored flight. The peak altitude of the rocket as recorded by this altimeter and sounded or flashed out on its audible or visible light transmission post-flight will be the sole basis for judging the altitude score and this altimeter may be used for no other purpose. Other altimeters of other types may be used for flight control or other purposes. The altitude performance goal for qualification flights is 820 feet (250 meters). The altitude score will be the absolute difference in feet between the altitude performance goal in feet and the altimeter-reported actual flight altitude in feet (always a positive number or zero). The altitude performance goal for flights at the Finals will not be 820 feet; it will be 800 feet and 850 feet, with the order for these between first and second flights determined by a coin toss at the student team pre-flight briefing at the Finals.

2.7 FLIGHTS

Team members cannot be changed after the first qualification flight, with one exception as noted below for the Finals. Only team members on record at the Aerospace Industries Association (AIA) with valid parent consent forms are eligible to receive prizes. To be eligible for the national final fly-off event, a team is required to fly and submit the results from at least two qualifying flights observed in person by an adult (senior) member of the NAR (unrelated to any team members or to the team's adult supervisor and not a paid employee of their school or member of their youth group) between June 1, 2023 and Monday, April 8, 2024. Each team may conduct a maximum of three qualification flights, and will be ranked based on the sum of the best two qualified flights. More than two qualification flights are not required if the team is satisfied with the results of their first two flights. A qualification flight attempt

REVISION 24
ARC-1 SHEET 4

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC
1000 WILSON BLVD.
ARLINGTON, VA 22209

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST REVISION DATE.

FORM 21-01

must be declared to the NAR observer before the rocket's motor(s) are ignited. Once an attempt is declared, the results of that flight must be recorded and submitted to the AIA, even if the flight is unsuccessful. A rocket that departs the launch rail or rod under rocket power is considered to have made a flight, even if all motors do not ignite. If a rocket experiences a rare "catastrophic" malfunction of a rocket motor (as determined by the NAR official observer), a replacement flight may be made, with a replacement vehicle if necessary. Flights which are otherwise fully safe and qualified but which result in no altimeter reading despite correct usage of the altimeter by the team will be counted as "no flight" and may be reflight without penalty. The results from qualification flight attempts must be entered into an online score reporting portal and received at the offices of the AIA by 11:59 PM Eastern time on Monday, April 8, 2024. Based on these qualification scores, 100 teams (with a limit of no more than the best two made up of students from any single school or organization) will be selected on the basis of lowest combined scores for their best two flights. If a school has more than two teams whose flight score is better than the cutoff score for Finals selection, they may adjust the membership of the two best teams invited to attend the Finals to include students from other teams with scores that met the Finals cutoff, up to a limit of ten students on any single team. Teams will be notified no later than 5 PM on Wednesday, April 17, 2024, and will be invited to participate in the final fly-off to be held on May 18, 2024 (alternate date in case of inclement weather will be May 19, 2024).

2.8 SAFE RECOVERY

The rocket must return to earth safely and at a velocity that presents no hazard. An entry which has any heavy structural part, or an expended motor casing separate from the rest and fall to earth without any form of recovery device will be disqualified. The rocket must be allowed to land at the end of flight without human intervention (catching) and the flight will be disqualified if there is such intervention.

2.9 RETURNS

Return of the entire rocket is required by the deadline time on that same day that was established at the beginning of the day's flying. If the rocket cannot be returned after an otherwise safe and stable flight because it cannot be located or because it landed in a spot from which recovery would be hazardous (as determined by an NAR official), a replacement vehicle may be substituted for a replacement flight. Once the NAR official has declared that a rocket has landed in a place from which recovery would be hazardous, the results from that rocket's flight may not subsequently be used even if it is recovered.

2.10 LAUNCH SYSTEMS

Teams may use the electrical launch system and the launch pads (with six-foot long, 1-inch rails) provided by the event officials or may provide their own rail or tower system as long as it provides at least six feet of rigid guidance; launch rods will not be permitted to be used at the Finals. Launch systems used locally for qualification flights prior to the Finals must provide the rocket with at least six feet of rigid guidance, with a rail or with use of a rod diameter of at least 1/4 inch, if a rod is used. All launches will be controlled by the event Range Safety Officer and must occur from the ground.

2.11 FLIGHT CONTROL

Rockets may not use an externally-generated signal such as radio or computer control (except GPS navigation satellite signals) for any purpose after liftoff. They may use autonomous onboard control systems or altimeters separate from the official scoring altimeter to control any aspect of flight as long as these do not involve the use of pyrotechnic charges or rocket motors.

2.12 PLACES

Places in the final fly-off of the competition will be determined on the basis of the sum of the altitude and duration scores. At the fly-offs, at least 24 teams will be invited to make a second flight based on the results of their first flights. In these second flights, rockets which have issues which would otherwise rate a replacement flight under ARC rules 2.7 or 2.9 will not receive a replacement flight. Prizes awarded to the top places will be awarded only to those teams that make a second flight. The top final places will be ranked on the basis of the scores from the two qualified flights made at the fly-offs. Remaining places will be awarded based on the scores from the first flight. Ties will result

REVISION 24
ARC-1 SHEET 5

in pooling and even splitting of the prizes for the affected place(s) -- for example, a two-way tie for 4th place would result in a merger and even division of the prizes for 4th and 5th places. If there is a tie for one of the top three places, the teams involved in the tie will be required to make a third flight to determine final places. AIA reserves the right to make all last and final contest determinations.

3. AIA'S NATIONAL AEROSPACE STANDARDS

This document is an example of what a voluntary consensus standard might look like within the Aerospace industry. AIA organizes and facilitates groups of subject matter experts to write, approve, and publish National Aerospace Standards that contain requirements and best practices, which are adopted by companies and governments around the world. Standards help to reduce costs and improve safety in design, manufacturing, and operations. AIA's National Aerospace Standards program is a vast collection of technical information and requirements that have been developed and maintained by the industry since 1941. For more information on AIA's National Aerospace Standards go to: www.aia-nas.org.

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC
1000 WILSON BLVD.
ARLINGTON, VA 22209

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

FORM 21-01

REVISION 24
ARC-1 SHEET 6